



**VANCOUVER**  
GREEN CAPITAL\*

# Do-It-Yourself Home Energy Audit

*green home renovation*  
*healthy homes for a healthy environment*





# Green

## Energy is a resource

You can save money on utility costs, have a more comfortable home and decrease your impact on the environment - all by improving the energy efficiency of your house.

Climate change, caused by greenhouse gas emissions from burning fossil fuels, is one of the biggest problems facing us in the 21st century. The energy used to heat and cool our homes, as well as the electricity we use for lighting and appliances, contributes to 20 per cent of greenhouse gas emissions that cause global warming.

Metro Vancouver is a leader in developing and promoting green or sustainable building strategies as well as renewable energy resources. Do you want to help to solve the problem of global warming and realize great benefits in the bargain? Make your home as energy-efficient as possible. The greenest resource available to us is the energy we save through efficiency. We can all take part in the solution.

# How

## Improve performance

By making energy efficient upgrades to your home, you will:

- **SAVE MONEY**  
Many homes see as much as a 30 per cent cut in energy bills. That's money in your pocket.
- **ADD COMFORT**  
Cutting drafts, keeping surfaces warmer, and balancing air circulation with air heating makes for a cozier home.
- **MAKE A HEALTHIER HOME**  
A tighter home with good ventilation provides better indoor air quality.
- **REDUCE ECOLOGICAL IMPACT**  
Improving your home's energy efficiency will help it work better for you and for the environment.

# Audit

## The whole house energy audit

The first step toward increasing your home's energy efficiency and comfort is to conduct a whole house energy audit.

A diligent tour of your home with this booklet, and its tear-out checklist to record your notes, will help you determine how well your home currently operates and what upgrades are needed to improve its energy performance.

Once you assess what needs to be done, the guide will help you with the second step - determining which upgrades will give you the biggest bang for your energy efficiency buck.

The guide's payback section provides information to help prioritize your upgrades; the resources section has references to the information needed to accomplish your goals.





# Contents

- 1**     **Introduction**  
Why conduct an energy audit.
- 3**     **How To Use This Guide**  
What you will need before you start your audit.
- 4**     **Tear-Out Checklist**  
Use this tear-out form to take notes as you conduct your audit.
- 6**     **The Building Enclosure**  
Understand the components of a building enclosure, how to investigate your own home, and what to do to improve its effectiveness.
  - Air Leaks
  - Insulation
  - Moisture Control
- 14**    **Space and Water Heating**  
Understand your home's mechanical systems, how well they are operating, and what improvements should be made.
  - Space Heating
  - Water Heating
- 17**    **Paybacks**  
Identify the most cost effective means to make your home energy-efficient.
- 18**    **Terms to Know**  
Definitions of common terms used throughout the guide.
- 19**    **Deep Green Considerations**  
New energy technologies and products.
- 20**    **Resources**  
Get more information about creating your own high-efficiency home.



*Before starting your audit, get free resource profiles from your local utility. For customers of BC Hydro, log on to your account at [www.bchydro.com](http://www.bchydro.com) to view the consumption history of your home's electricity use. You can also view BC Hydro's Buyer Guides for information on your home's resource use and suggestions for improvements. Terasen's natural gas customers can view their account information online at [www.terasengas.com](http://www.terasengas.com).*

*Increasing numbers of homes in the Lower Mainland are installing water meters to measure their water usage and lower their bills. The City of Vancouver offers online billing information at [vancouver.ca](http://vancouver.ca).*




## Introduction

At its most basic, your home is a big box that protects you from the weather and maintains a comfortable temperature throughout the year. Two components - the building enclosure and the heating system - are at the heart of what makes your home operate efficiently while providing maximum comfort.

This booklet will show you how to conduct a basic inspection of your home's enclosure and heating system in order to make informed decisions about energy efficiency upgrades. It is not meant to be a substitute for a professional audit or for professionally installed efficiency upgrades. But there are many tasks that even a novice homeowner can easily accomplish, and we focus on those activities.

After you complete your audit, develop a master plan for improvements. Start with low cost and no cost measures you can do yourself; then ask yourself if you are capable of performing more extensive work that may involve time in attics and crawl spaces. Consider hiring a professional to complete the more complicated work. A good master plan can be implemented over time to help you reach your goals.

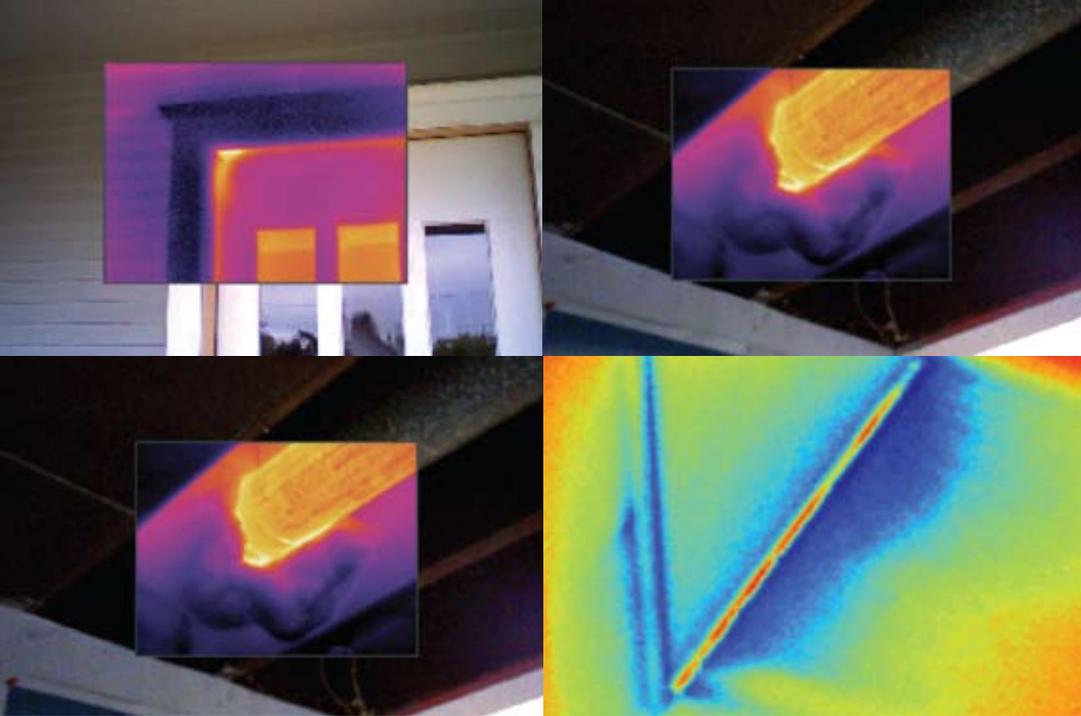

## Professional Inspections and Audits

A professional energy audit comes with a fee, but gives you the benefit of a building performance expert's experience and judgment. Be sure to hire an independent auditor, one who doesn't represent a specific product or system. Professional tools, including test equipment for air leakage and infrared camera scans, allow you to 'see' energy losses in new ways. Here are some examples of home performance services available:

- Blower door test - by depressurizing the home with a large fan and then measuring airflow into the home, the overall air leakage of the entire home can be measured. The test can also be used to determine the location of leaks (pictured to the right).
- Duct pressure test - will identify the area and location of leaks in the duct system. A related 'balance' test of the heating ducts determines if the right amount of air is flowing to each room for comfort and efficiency. Other tests confirm combustion safety and ventilation fan flows.
- Heat pumps and A/C commissioning - a set of tests that confirm the systems have the correct air flow and refrigerant charge. Equipment may have been sized using only rules of thumb, which can mean poor performance and durability.
- Thermal imaging - measures surface temperatures using infrared cameras and creates a visual image of heat loss. The cameras detect radiation in the infrared range of the electromagnetic spectrum. Typically, warmer surfaces appear brighter, and cooler surfaces appear darker. The images can reveal where walls, ceilings or floors are inadequately insulated or where windows and doors aren't well sealed (pictured above).



# How to Use This Guide

## Preparing for the Audit

- Read through this entire guide first to understand the audit process and any safety and health concerns
- Plan to spend a couple of hours to conduct the inspection
- Assemble tools and appropriate clothing - see below
- Fill in your audit checklist as you go

## Tools and Materials

- Dust mask, eye protection, coveralls and gloves
- Pen or pencil and this guide
- Calculator to calculate the size of attic and crawl space vents
- Ruler or tape measure to determine insulation depths
- Screwdriver to remove electrical outlet and switch plate covers
- Plastic knitting needle, wooden chopstick or wood skewer to probe for insulation
- Incense stick or candle to detect air leaks
- Flashlight
- Ladder

## Safety

Crawl spaces may contain a variety of dusts and animal droppings. You will want to wear appropriate clothing and safety equipment for the audit as well as make sure you are physically up to inspection tasks. Ladders and step stools should be secure. Get help with ladders if needed.

## Items of Particular Concern:

- Asbestos - still common around pipes, air ducts, old heating equipment and in vermiculite insulation. It may look like a light grey or white fibrous material. Asbestos is dangerous, but particularly so when particles become air-borne. Do not touch or vibrate anything you suspect contains asbestos. If you suspect asbestos, consult the WorkSafe bulletin on asbestos in renovation projects at [www2.worksafefbc.com/i/posters/2003/WS%2003\\_03.htm](http://www2.worksafefbc.com/i/posters/2003/WS%2003_03.htm).
- Fibreglass - use goggles, a dust mask, gloves and long sleeves to protect lungs and skin from irritating particles.
- Wiring - Turn off electricity at the breaker before probing for insulation or checking in the vicinity of any wiring. Consult an electrician if you see bare wires or connections not contained within covered boxes.

You can search Light House Sustainable Building Centre's service provider directory for Energy Audit companies in the Lower Mainland [www.sustainablebuildingcentre.com](http://www.sustainablebuildingcentre.com). Go to page 18 for definitions of terms used throughout this guide.

# Tear-Out Checklist

Use this form to make detailed notes as you inspect the various areas of your home. The checklist is set up by location so you don't have to visit one area more than once. For each area, you will be checking for insulation, air leaks, moisture problems and the heating system components.

## Ceiling Above Heated Area

### Comments/Concerns

<b>Attic hatch</b>	<input type="checkbox"/> insulated	<input type="checkbox"/> weatherstripped	_____
<b>Attic floors</b>	<input type="checkbox"/> insulated	<input type="checkbox"/> R-Value _____	_____
<b>Attic roof (sloped)</b>	<input type="checkbox"/> insulated	<input type="checkbox"/> R-Value _____	_____
<b>Dropped ceiling</b>	<input type="checkbox"/> insulated	<input type="checkbox"/> R-Value _____	_____
<b>Cathedral ceiling</b>	<input type="checkbox"/> insulated	<input type="checkbox"/> R-Value _____	_____
<b>Flat roof</b>	<input type="checkbox"/> insulated	<input type="checkbox"/> R-Value _____	_____
<b>Wall top plates</b>	<input type="checkbox"/> insulated	<input type="checkbox"/> R-Value _____	_____
<b>Attic side walls</b>	<input type="checkbox"/> insulated	<input type="checkbox"/> R-Value _____	_____
	<input type="checkbox"/> blocked	<input type="checkbox"/> sealed _____	_____
<b>Chimney chase</b>	<input type="checkbox"/> sealed		_____
<b>Duct penetrations</b>	<input type="checkbox"/> sealed		_____
<b>Pipe &amp; wire penetrations</b>	<input type="checkbox"/> sealed		_____
<b>Recessed lights</b>	<input type="checkbox"/> sealed	<input type="checkbox"/> insulated	_____
	<input type="checkbox"/> baffled if not IC rated		_____
<b>Exhaust fan 1</b>	<input type="checkbox"/> working	<input type="checkbox"/> vented to outside	_____
<b>Exhaust fan 2</b>	<input type="checkbox"/> working	<input type="checkbox"/> vented to outside	_____
<b>Ducts</b>	<input type="checkbox"/> insulated	<input type="checkbox"/> R-Value _____	_____
	<input type="checkbox"/> joints sealed		_____
<b>Hot water pipes</b>	<input type="checkbox"/> insulated	<input type="checkbox"/> R-Value _____	_____
<b>Vents</b>	<input type="checkbox"/> vents-high # _____	<input type="checkbox"/> total net free area _____	<input type="checkbox"/> cleared/baffled _____
	<input type="checkbox"/> vents-low # _____	<input type="checkbox"/> total net free area _____	<input type="checkbox"/> cleared/baffled _____

## Heating System (in Attic or Basement/Crawl Space)

<b>Furnace</b>	<input type="checkbox"/> filters clean	<input type="checkbox"/> size/type _____	_____
	<input type="checkbox"/> sealed combustion	<input type="checkbox"/> flame retention	_____
<b>Boiler</b>	<input type="checkbox"/> pipes insulated	<input type="checkbox"/> R-Value _____	_____
	<input type="checkbox"/> sealed combustion		_____
<b>Water heater</b>	<input type="checkbox"/> insulated shell	<input type="checkbox"/> water temperature _____	_____
	<input type="checkbox"/> pipes insulated	<input type="checkbox"/> R-Value _____	_____
	<input type="checkbox"/> sealed combustion	<input type="checkbox"/> heat traps	_____

## Floor Below Heated Area (Basement or Crawl Space)

<b>Floor joists</b>	<input type="checkbox"/> insulated	<input type="checkbox"/> R-Value _____	_____
<b>Rim joists</b>	<input type="checkbox"/> insulated	<input type="checkbox"/> R-Value _____	_____
<b>Ducts</b>	<input type="checkbox"/> insulated	<input type="checkbox"/> R-Value _____	_____
	<input type="checkbox"/> connected	<input type="checkbox"/> sealed	_____
<b>Hot water pipes</b>	<input type="checkbox"/> insulated	<input type="checkbox"/> R-Value _____	_____
<b>Ground cover (crawl space)</b>	<input type="checkbox"/> fully covered		_____

## Floor Below Heated Area (Garage and/or Cantilevered Floors)

<b>Floor joists</b>	<input type="checkbox"/> insulated	<input type="checkbox"/> R-Value _____	_____
<b>Rim joists</b>	<input type="checkbox"/> insulated	<input type="checkbox"/> R-Value _____	_____

Tear along dotted line

## Walls (Inspected From Inside)

**Between interior/  
exterior**  insulated  R-Value \_\_\_\_\_

**Between heated/  
unheated**  insulated  R-Value \_\_\_\_\_

**Pipe & wire penetrations - baths**  sealed

**Pipe & wire penetrations - kitchen**  sealed

**Switches & outlets**  gaskets

**Baseboards/wall fans**  dusted  12" from furniture/  
combustibles

**Thermostat(s)**  working  automatic setback

## Doors/Windows

**Front door(s)**  weatherstripped  sealed  
 threshold weatherstripped

**Back door(s)**  weatherstripped  sealed  
 threshold weatherstripped

**Door(s) to unheated  
area(s)**  weatherstripped  sealed  
 threshold weatherstripped

**Dog/cat door**  weatherstripped  sealed

**Windows - LR/DR**  weatherstripped  sealed

**Windows - kitchen**  weatherstripped  sealed

**Windows - bath**  weatherstripped  sealed

**Windows - den/office**  weatherstripped  sealed

**Windows - BR 1**  weatherstripped  sealed

**Windows - BR 2**  weatherstripped  sealed

**Windows - BR 3**  weatherstripped  sealed

## Fireplace

**Damper**  tightly sealed when closed

**Firebox**  heat exchanger or fireplace insert  insulated panel

**Chimney through ceiling**  sealed

## Exterior of House

**Gutters and eaves**  sealed  cleared of debris

**Downspouts**  connected  sealed

**Window/door flashings**  sealed

**Trees or bushes**  trimmed back

**Crawl space vents**  #: \_\_\_\_\_  total net free area \_\_\_\_\_  cleared/baffled \_\_\_\_\_

**Windows - LR/DR**  sealed  insulated glass

**Windows - kitchen**  sealed  insulated glass

**Windows - bath**  sealed  insulated glass

**Windows - den/office**  sealed  insulated glass

**Windows - BR 1**  sealed  insulated glass

**Windows - BR 2**  sealed  insulated glass

**Windows - BR 3**  sealed  insulated glass

**Front door trim**  sealed  insulated glass

**Back door trim**  sealed  insulated glass

**Pipe & wire penetrations - baths**  sealed

**Pipe & wire penetrations - kitchens**  sealed

**Foundation to walls**  sealed

**Chimney to wall**  sealed

**Small cantilevered areas (bay/garden window/bump-out)**  insulated  R-Value \_\_\_\_\_

## Comments/Concerns

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_


\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

# The Building Enclosure

The first step in an energy audit is to understand where the boundary is between the heated and unheated spaces in your home. This boundary is called the building enclosure, envelope or shell. It includes the walls, ceilings and floors between the inside and the outside, as well as those between heated and unheated spaces, such as a garage or basement. In a simply shaped home it may include just four walls, a ceiling and floor, but most homes are more complex. A heated floor becomes a porch floor, or a side attic connects to a wall. Bay windows have tops and bottoms, and skylight wells must be insulated, too. It may help to make a sketch similar to the one shown, identifying the specific configuration of your home.

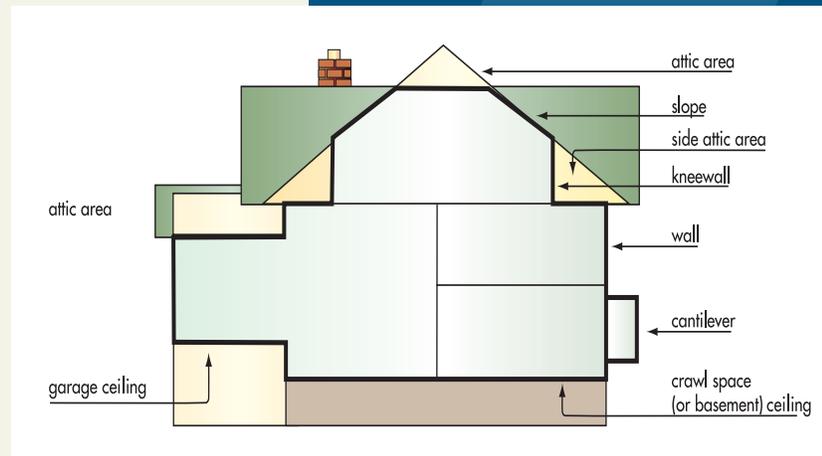

## 1. Air Leakage

### What It Is

We often think of insulation as the primary means to create an energy-efficient building enclosure. However, like a sweater with a windbreaker, insulation must work with an air barrier to be effective. The air barrier prevents the movement of air between the interior and the exterior (or unheated spaces). Where there are gaps in the air barrier, air leakage occurs. Cold air from the outside enters the home and warm air from the interior escapes. Since warm air rises, a heated home in winter acts like a big chimney. As the warm air rises and escapes through ceiling penetrations, cold air is pulled in from the basement, garage, or crawl space. The cold air can bring dust or pollutants with it, as well as make our homes more dry. This occurs when moisture escapes with the warm air and the cold air coming in lowers the humidity in the space.

Any penetration in the building shell will result in air leakage. Along with doors and windows, obvious places where cold outside air enters a home are penetrations for heating ducts, water pipes, sewer stacks, wiring, lighting fixtures, electrical switches and outlets, chimneys, ventilation fans, attic hatches, fireplaces and pet doors. Air leakage can be responsible for up to 1/3 of the heating cost, so it's a very good investment to tighten up your home.



### How To Look For It

Identifying air leakage involves two approaches: (1) taking a visual inventory of potential problem areas, and (2) noting actual air movement. You will want to move around the interior of your home and look for leaks in the building enclosure, checking exterior walls, ceilings and floors. You will also investigate the unheated side of your ceilings and floors by looking in your attic and crawl space or unheated basement. By checking the unheated side of ceilings and floors you can find problem areas not evident from the inside.

Use the diagram you created of your building enclosure to help identify areas to investigate. An efficient method would be to go to each room in your house, first looking for specific problem areas and then using your incense stick to identify air movement. You can note air leakage points on the checklist and/or mark those locations with tape. (Blue painters tape, available in hardware stores, won't leave a tape mark.)



**Air Movement.** You can often feel air leaks, especially on a windy day, by simply placing your hand in front of potential leakage spots. You can dampen your hand to feel the air flow better. A more effective method is to use an incense stick, and negative pressure in your home, to actually visualize where there is air movement. First, close all exterior doors, windows, and fireplace flues. Second, turn off all combustion appliances such as the water heater and furnace. Third, turn ON all exhaust fans and even the dryer on a no heat setting. This will create a small amount of negative pressure in your home - drawing more air from outside to the interior and making the leaks more apparent. Smoke from the incense stick will show air movement, swirling or even rushing in. Keep a damp cloth below the burning ash and keep well away from combustibles. You can also try thin strips of bath tissue taped to the end of a kitchen straw or skewer to show air movement.

**Windows.** Look for any missing or cracked caulking or weatherstripping, broken latches and cracked window panes. Sometimes, there is leakage around the inside of windows where the glass meets the frame or the frame meets the wall.

**Doors.** Check each door that opens to the outside or to an unheated space, such as a garage, shop, mud room or enclosed porch. Be sure to include any dog and cat doors. Check for cracked or missing weatherstripping at the top and sides, and look for a door sweep at the bottom. The door threshold is also a common place for leaks.

**Electrical Outlets and Light Switches.** Check that those on outside walls or walls next to unheated areas have rubber or foam gaskets.

**Exhaust Fans.** Pull the cover down and note if there are large gaps where the fan housing meets drywall or plaster.

**Pipe and Wire Penetrations.** Where sinks are located at exterior walls, or adjacent to unheated spaces, look under the sink. Gaps are often left in the wall where pipes and wires pass through the wall.

**Recessed Lights.** These are notorious for air leakage. Note whether they are 'Air Loc' models and/or rated for insulation contact. Rated fixtures should have a sticker on the inside that says "IC".

**Joints Between Different Types of Construction.** This includes brick chimneys to wood walls, vertical joints where foundations step up, and where roof beams meet drywall or trim.

**Main Attic.** In the attic, you are essentially looking for holes in the ceiling. First, note if you can see light coming up from below. Next, look for dark markings on insulation, over pipes or at wall top plates, which indicate that there is an air leak and dust is being drawn through. Lastly, identify all of the items that penetrate the ceiling - chimney, pipes, recessed lights, wires - and check for gaps around them. If there is insulation, pull it away to get a clear view. Chimneys and soil stacks can often be the most serious air leaks in a home. Note whether the attic hatch has good weatherstripping.

**Side Attic.** Check between the floor joists under a side attic wall. Is there solid blocking between the joists? Are any gaps in the blocking sealed? If not, you will have heat loss from the floor on the heated side of the wall into the attic space.

**Crawl Space or Unheated Basement.** The space under your first floor is much like the attic. Note light coming from above and look for gaps at all penetrations, pulling away insulation when needed.

**Heated Basement.** A common area of air leakage is where the wood frame of the house rests upon the concrete or block foundation. Outside air can be drawn in under the mud sill, the horizontal board that forms the base of the wood frame. Another leaky area is at the rim (or band) joist. The rim joist forms the perimeter of the floor framing above, and the floor joists butt into it, creating multiple cavities along the length of the wall and many opportunities for air leakage.

## What To Do About It

Once you've identified where air leakage is occurring, you'll want to seal off these gaps. Depending on location, you can seal air leaks with caulk, sealant or spray foam. Apply caulk where you need a flexible seal at narrow joints; weatherstripping is used where two surfaces move against each other, like at a window; and spray foam is an excellent choice for irregular shaped gaps because it will expand to fit any opening. Before you seal gaps, review the ventilation section in this guide and the Caulking Options section in the accompanying Bath & Laundry Renovation Guide available for download from [vancouver.ca/sustainability](http://vancouver.ca/sustainability)

**Windows.** Weatherstrip around the window sash (the sash is the part that moves) and apply caulk between the window frame and trim and between the trim and the wall.

**Doors.** Install weatherstripping at the tops and sides and a sweep at the base of the door. Install a door threshold if one doesn't already exist and caulk or replace those that leak.

**Electrical Outlets and Switches.** Install foam or rubber gaskets behind the outlet and switch plate covers on all exterior walls.

**Exhaust Fans, Pipes and Wires.** Seal all gaps with spray foam.

**Recessed Lights.** These should not be caulked or foamed tight unless they are IC rated. Older cans that are not IC rated could overheat. If there is space, you can build a box out of 3.5cm (1 inch) rigid foam insulation leaving a 10-15cm (4-6 inch) air space around the light. Seal the box at all joints and to the back of the ceiling material. The best solution is to replace the light with a new IC 'Air Loc' model. These come with a gasket that seals the light fixture where it meets the drywall, minimizing air leakage.

**Joints Between Different Types of Construction.** Use caulk or spray foam to seal leaks.

**Attic/Crawl Space/Basement.** Use spray foam to seal irregular gaps around pipe and wire penetrations. Caulk is effective for small holes. In attics, crawlspaces and basements that have existing insulation, pull back the insulation during the sealing and then put it back when done.

**Side Attic.** Install wood blocking between open floor joists below the knee wall and seal any gaps with spray foam.

**Fireplace and Duct Penetrations.** If there is a large gap in the attic or basement next to a brick chimney, or ductwork, you'll need to use a fire-rated sealant. If the gap is large, first install fitted sheet metal or cement board pieces to cover the opening and then seal the joints.

For a detailed air leakage control guide refer to the publication 'Keeping the Heat In', available free from: Energy Publications, Office of Energy Efficiency, Natural Resources Canada, c/o SJDS, Ottawa ON K1G 6S3.



## Fireplace

### What It Is

A fire burning in an open fireplace is the least efficient way to heat your home because 90 per cent of the fire's heat goes up the chimney with the smoke. A roaring fire takes combustion air from the house and can pull all the heated air out in less than 30 minutes. Even when not in use, the fireplace can be a big cause of heat loss if the damper does not seal well.

The damper is the metal plate in the chimney above the fire box used to regulate the draft. Dampers should be kept closed when the fireplace is not in use (and any previous fire is completely out). Leaving your fireplace damper open when there is no fire is like leaving your front door wide open and will dramatically increase heat loss. The City of Vancouver's Green Homes Program includes new standards to increase efficiency for gas-fuelled fireplaces: electronic ignition, estimated to save around \$120 in natural gas every year over pilot-lit fireplaces; and direct venting, ensuring that the fireplace only consumes outside air and eliminating the need for a chimney.

### How To Look For It

Use a bright flashlight to check your fireplace damper. The damper should have a tight seal when closed. If you cannot tell if it's tight, close the damper on a day or evening when there is a breeze. Hold a lighted incense stick under the damper. If the flame or smoke sways or moves, the seal needs tightening. A professional mason can do these repairs.

### What To Do About It

Install tight-fitting glass doors to increase the overall efficiency of an existing fireplace. Or consider installing one or more fireplace devices such as a flue top damper, air vents, heat exchangers and/or fireplace insert. In some cases an ash cleanout passage can be modified to bring outside air to the fire. Some people make a decorative panel with foam insulation on the back to fit snugly in the opening when not in use. If your fireplace is no longer used, you may wish to engage a chimney repair service to permanently seal off the chimney.

# Insulation Options

INSULATION	R-VALUE	WHAT IT LOOKS LIKE	COMMON APPLICATIONS
<b>Fibreglass Batts</b>	2X4 = R-11 2X6 = R-19* 2X10 = R-30 2.9-3.8/inch	Pink or yellow blankets. Can be unfaced, paper or plastic faced, or encapsulated for ease of installation.	Install in open wall, floor or ceiling cavities. Must be carefully installed avoiding gaps, voids or compression. Considered to have little or no negative impact on indoor environmental quality.
<b>Cotton-Fibre Batts</b>	2X4 = R-13 2X6 = R-19-21 2x10 = R-30 3.0-3.7/inch	Light blue to dark blue fluffy cotton, made from blue jean manufacturing cut-offs.	Non-toxic. Non-irritating during installation. Easy to install and does not offgas. Can be used in place of other batt insulation products. A newer product not typically found in older homes.
<b>Rockwool Batts</b>	2X4 = R-13 2X6 = R-22 2x10 = R-33 2.8-3.7/inch	Dark gray or black batts with paper facing.	Gaining popularity in residential application, but most commonly used for industrial and commercial construction. Extraction and processing of mineral wool (a by product of steel processing) may still be an environmental concern.
<b>Fibreglass Loose Fill</b>	2.2-2.7/inch (varies based on density)	Pink, yellow or white fluffy material that comes compressed in bags.	Good choice for blowing into attics. Important that contractor set blower correctly to establish correct thickness and density. Most now contains some recycled content, and some manufacturers have replaced the traditional-but-toxic phenol formaldehyde binder with other more benign alternatives – or no binder is used at all. Loose fill is associated with black mould and health hazards similar to those associated with asbestos such as lung disease.
<b>Cellulose Loose Fill</b>	3.0-3.7/inch	Gray finely chopped up newspaper with fire retardant added - usually borate salts which inhibits mould and fungus.	Excellent choice for blowing into attic or closed wall cavities. Be sure to seal any air gaps first so dust does not blow into home. When spray applied this is quite dense and provides a good barrier against air infiltration from the outside. Due to the spray in nature of the installation, performance is less likely to suffer from installation errors.
<b>Vermiculite Loose Fill</b>	2.4/inch	Looks like kitty litter or very small mica flakes. May contain asbestos.	No longer used today.
<b>Extruded Polystyrene (ExPS or XPS) Rigid Foam</b>	5.0/inch	Blue or pink rigid board.	Waterproof. Excellent for exterior sealing or insulating basement walls. Can be applied directly to concrete. Must be protected from sunlight.
<b>Expanded Polystyrene (EPS) Rigid Foam</b>	3.6-4.4/inch	Usually white - also know as 'bead board'	Low cost but not as sturdy or moisture resistant as ExPS. Must be protected from sunlight. Of the two main types of rigid polystyrene (XPS or EPS) EPS is more environmentally benign.
<b>Rigid Polyisocyanurate</b>	6.0-6.5/inch	Foam boards with foil facing. 4x8, 4x9 and 4x10 foot sheets.	Thermax or R-max are common trade names. Best R-value overall. Best choice for maximum insulation in a thin area such as rafters in a cathedral ceiling.
<b>Low Density Spray Foam</b>	3.8/inch	Yellowish, white foam that goes on wet and dries quickly. Expands as it is applied.	Excellent for sealing irregular gaps. Expands to fill the cavity, including the smallest cracks. Products range from those with a high content of toxic substances, to those that are water-blown and do not offgas, such as Includes "Icynene" and soy based foams.
<b>High Density Spray Foam</b>	6.5/inch	Yellowish, white foam that goes on wet and dries quickly. Expands as it is applied.	Excellent for sealing irregular gaps. Includes "Corbond" and urethane.

For more on selecting insulation materials, see the City of Vancouver's Passive Design Toolkit for Homes, available for free download at [vancouver.ca/sustainability](http://vancouver.ca/sustainability)

## 2. Insulation

### What It Is

Insulation slows the transfer of heat from the warm side to the cold side of a wall, ceiling or floor. Its purpose is to keep heat in during the winter and out during the summer. Placing insulation between living spaces and unheated areas produces a protective shell around your home. Insulation products are rated by their resistance to heat flow, called R-Value. The higher the number, the more effective the insulation and the lower your energy bills. Most homes in the Canada built before the 1970's are poorly insulated, if at all. Modern energy codes require minimum levels of insulation; in BC the BC Building Code specifies insulation values and energy performance, while the City of Vancouver has additional by-laws which in many instances exceed the provincial code (see side bar).

### How To Look For It

To see if and how well your home is insulated you will be going to each area of your home's envelope areas - walls, floors, ceilings - and looking at both the type of insulation installed and its thickness. Some areas may be easy to see, such as insulation in an attic space. In other areas such as walls, you will need to probe behind the surface.

If you are unable to determine the insulation type and/or depth, such as in a flat roof or cantilevered ceiling, professional insulation contractors and energy raters will be able to investigate further with laser thermometers or an Infrared scanner. If your attic has no opening, you should make one yourself or have a contractor do it for you.

### WALLS

#### Living Areas

You can often check for wall insulation by looking inside wall cavities behind outlet or switch covers. Make sure you choose walls next to the outside or next to an unheated area and not walls between heated rooms. You can expect insulation to be different in renovated areas, so be sure to include these as well. Before you begin, turn off electricity at the circuit breaker or fuse box. At each of the exterior walls you will be investigating, use your screwdriver to remove the cover plates from an electrical outlet or light switch.

1. Shine a flashlight into the opening between the electrical box and the edge of the wallboard or plaster to see if you can detect insulation.
2. If you are not sure if the wall is insulated, use a non-metal knitting needle, wood chopstick or wood skewer to gently and carefully probe the opening between the plaster and the long edge of the electrical box. This is an optional step as you can cause damage to electrical wiring if you probe improperly. There may be a small gap between the electrical box and the insulation, so be sure to check slightly away from the box. If any insulation is present, then the wall cavity is probably full.
3. Determine the type of insulation, whether it's batt or loose fill, and its thickness. Use the insulation chart on page 9 to determine the R-Value.
4. Replace the cover plates and turn power back on.

*Note: You may be able to determine whether your walls are insulated by checking from the outside. If you have wood siding, look along the siding for evidence of drilled and plugged holes. These holes suggest that insulation was blown in after the house was built, with either loose fill fibreglass or cellulose. If you know the depth of the wall, then you can use the insulation chart to estimate its R-Value.*

#### Attic

If you have a heated room on your top floor, check to see if you have an unheated attic space to either side. The wall between the heated space and the cold attic to the sides (called the knee wall) should be insulated. If there is an access door to the side attic, you can check for insulation (and determine the depth) from the attic side. If the side attics are inaccessible, check from the inside using the method for walls, identified above, or cut out an access door.

#### Basement

If your basement is heated, the exterior walls should be insulated; the City of Vancouver now requires R-22 for the full height of basement walls.



*The City of Vancouver Green Homes Program specifies insulation requirements for residential construction:*

- *attic – R-40*
- *roof joist assembly – R-28*
- *exterior wall – R-22*
- *full height of basement wall – R-22*
- *under slab – R-12*
- *framed suspended floor – R-28*
- *concrete slab suspended floor – R-12*
- *windows – max U-2*
- *radiant heating suspended floor – R-12*

Concrete walls can be insulated from either the exterior or interior. On the exterior of the wall, the insulation will typically be rigid foam. Rigid foam is also sometimes used on the interior of the wall. If you find rigid board insulation, poke a cocktail skewer through it to measure thickness and use the insulation chart to estimate its R-Value. More typically, the interior will have a wood framed wall (built to the inside of the concrete wall) filled with batt insulation and finished with wallboard. A pony wall has similar construction, but is located above the concrete wall instead of beside it. In both cases, use the method for checking at electrical outlets or switches, identified above, to determine the insulation level.

Where the basement wall - either concrete or a wood framed pony wall - meets the structure of the floor above, you'll find the rim joists. These spaces should be checked for insulation as well.

*Note: The interior face of basement walls should not have plastic vapour barriers. Plastic on an existing wall may cause extensive moisture build up in the insulation and framing members. Remove plastic and check for any signs of water damage.*

## Windows and Doors

### What It Is

Windows and doors are a major source of heat loss in the building enclosure. While the wall may have an R-Value of 21, even the most energy-efficient windows will only achieve an R-Value of 3 or 4. Older, single-paned windows will have R-Values as low as R-1. On the other hand, windows do provide energy benefits. Daylight entering through windows helps reduce our reliance on electric lighting. In winter, solar heat enters through the windows and contributes to space heating. For more information on the power of the sun to passively heat and light your home, download the Passive Design Toolkit for Homes, available from [vancouver.ca/sustainability](http://vancouver.ca/sustainability).

### How To Look For It

If you have single-pane windows, upgrading to efficient double-paned windows is your most effective option. Even the small increase in R-Value from R-1 to R-3 can make a noticeable difference in your utility bills and comfort, not to mention the benefits in noise reduction, superior weatherstripping and advanced framing of newer windows. Replacing windows can be quite costly and have a long payback period. If you are on

a budget, install insulated shades or plastic storm windows. If installed without air gaps, temporary do-it-yourself plastic film is another inexpensive means to improve the insulating value of your windows.

### A Note About Window Ratings

The overall quality of a window is key to its performance and can be determined by the thermal quality of the glass and the frame. Further considerations are the solar heat gain coefficient of the glass and of the spacer material. In contrast to insulation, windows are rated by their U-Value, which is the reciprocal of R-Value ( $U = 1/R$ ). U-values for windows can refer to the centre of glass or edge of window 'whole frame' measurements. The value will change with the size of the window because the ratio of window to frame will increase as the window gets bigger. Most manufacturers provide the U value of the glass and the frame separately - proper analysis must assess the U value of the entire system.

## CEILING

### Attic

1. Find the attic spaces in your house. A one story house usually has just one. If there have been one or more additions or you have several levels, you may have two or more different attic spaces with separate access holes. Access holes are often in the ceiling or side wall of a closet, hallway, laundry room or staircase. If you can't find an access hatch to your attic, you may want to make one. Look into each attic space to check for insulation.
2. Once your head and shoulders are inside the access hole, shine your flashlight beam over as much of the attic as you can. Look for potential hazards in case you need to enter and move around in the space, such as electrical wiring or nails coming through the roof sheathing.
3. If you need to move around in the attic, always step on the wood beams (ceiling joists) and not between them. Stepping between joists can disrupt electrical wiring and/or damage ceilings - or injure you if you break through the ceiling.
4. Look for insulation that should be on the attic floor. It might be in the form of batts (fluffy rolled-out blankets) or loose fill. If the insulation is evenly spread, you do not need to enter the attic. Measure its thickness from the access hole. Some attics have more than one layer of insulation. Measure the total thickness and check the insulation chart to get an approximate R-Value. If you notice varying levels of insulation, measure the depth in a several places and average them together. Also look for soffits or dropped ceiling areas where insulation may have been missed.

## *Cathedral Ceiling or Flat Roof*

Sloped or vaulted ceilings and flat roofs are difficult to check for insulation. You may find that removing a light fixture allows you to probe for insulation in the same manner as probing at electrical outlets worked at walls. It may be possible to remove a recessed can fixture to see inside the cavity. If you are unsure how to remove the fixture, you may want to seek the help of an electrician. If you determine that there is insulation in the ceiling, but can't assess the depth from the interior, you can measure the depth of the rafters at the exterior eaves to determine it's likely thickness. Note that the full depth of the rafters may not be filled with insulation and a properly insulated roof will have a 2.5cm (1 inch) air space between the top of the insulation and the top of the rafters. Sometimes you have to make an estimate based on the date of construction and the codes at the time.

## **FLOORS**

### *Unheated Basement*

If your basement is unheated, the ceiling becomes part of the shell that encloses your heated space. If the ceiling is exposed, checking the insulation type and depth is straightforward. If there is a finished ceiling, look for any small exposed area or crack where you can insert your non-metal probe to check for the presence of insulation and measure its depth. As with a cathedral ceiling, you may be able to remove a light fixture to access the ceiling/floor cavity.

### *Heated Basement*

If the basement is heated by the same system that heats the rest of the house, the basement ceiling does not need insulation. However, basement ceiling insulation is recommended if there is a separate heating system just for the basement. By insulating between the two different heating zones, the basement can be kept at a different temperature than the remainder of the house or the heat to be turned off entirely when the space isn't being used.

### *Crawl Space*

A crawl space is similar to an unheated basement with the ceiling acting as the building enclosure. To check the insulation, you'll need to access the crawl space. Many homeowners have never entered their home's crawl spaces. It often involves crawling into a low dark place that may be a hiding place for bugs or rodents or their droppings. The ground may be wet and ducts and pipes may obstruct your view. But not knowing what is in your crawl space could be costing you hundreds of dollars a year.

Start by locating the access opening. It may be in the floor of your home in a closet, on the outside foundation wall or both. Be sure you have found all the access doors or ways to see unheated crawl spaces.

1. Measure the insulation depth between floor joists above you. Floor insulation material is usually fiberglass batts. Some homes have aluminum foil attached to the floor joists. This material alone does not provide adequate insulation. Make sure you probe for insulation under any covering. If the batt insulation has a paper or foil facing you, the batts have been installed backwards and should be reversed. (Moisture created inside the home can condense in the batts, and damage them).
2. Check to make sure there are no gaps in insulation coverage. Even small gaps can increase heat loss significantly.
3. While in your crawl space, you may also want to check items identified in the Moisture Control and Space Heating sections.

### *Cantilevered Floors*

Cantilevered floors are a part of the home that jut out past the foundation wall. They are most common for bay windows, window seats or small bump-outs in living/dining rooms, kitchens or even a garage. Floor insulation for these areas is often overlooked. Check cantilevered areas for insulation and air leaks. At a cantilevered floor over a porch, garage or basement you may find a light fixture you can remove to probe for insulation.

## **What To Do About It**

You can increase the levels of insulation in any or all parts of your home by hiring a professional insulation contractor or by doing the work yourself. If you choose to do it yourself, see the resources section for information and how-to-guides and be certain that you are well informed on proper installation techniques.

*NOTE: Seal leaks before you insulate - sealing is more cost-effective than installing insulation.*





## 3. Moisture Control

### What It Is

Excessive moisture is a precursor to mould and mildew. Excessive moisture shows up on windows that "sweat" and as mould on walls. Moisture can enter from the exterior, from roof leaks, cracked foundations, uncovered dirt flooring in the crawlspace, blocked gutters, exhaust fans that are vented into the attic, vegetation too close to the house or poor attic or crawl space ventilation. Moisture is also generated inside the home from cooking, bathing and breathing - normal daily household activities. This moist air can then enter walls and ceiling cavities through unsealed cracks.

If your house does not have eaves, it is especially prone to having wet walls. In the 40's, homes were often built without eaves. Gutters were installed where the wall and roof intersected, allowing rain to easily pass behind the gutter and drip directly into the wall cavity, causing mould and mildew and making the home harder to heat.

Proper attic or crawl space ventilation is critical for keeping air circulating in your attic and crawl space areas. It may seem counter-intuitive to encourage cold air to enter attic or crawl spaces, but good venting removes water vapour before it has the opportunity to condense and ruin insulation and the wood structure of your home.

### How To Look For It

Inspect the outside of your home, along with your attic and crawl space, for possible moisture problems.

1. Check roof, gutters and foundation for cracks and leaks.
2. Note trees and bushes that touch walls or roof or hang over the gutters. They will need to be trimmed back.
3. Look in your attic to ensure that any fans are ducted to vent to the exterior, NOT into the attic itself.
4. Look around the entire perimeter of your crawl space foundation for vents. Count the number and measure their openings in square inches. As a rule of thumb you need one square foot of net free area for every 300 square feet of crawl space. Net free area refers to the size without the interference of screens or louvers. Subtract about half the total opening size to get an approximate net free area.
5. Check to see if there is a plastic ground cover in your crawl space. It should cover every inch of dirt. Even small gaps can contribute to moisture problems inside your home.
6. While in the crawlspace, check to see that all vents are clear of debris, blocking or insulation.
7. Look on your roof, under your eaves or on the gable ends for attic vents. As a rule of thumb, attic ventilation should be at least one square foot of net free area for every 300 square feet of attic area when half the vents are placed low and half the vents are placed high. Double that amount if you do not have a combination of high and low vents. Examples of low vents are soffit and eave vents covered with louvers or screens. High venting includes roof jacks, gable vents and ridge vents.

Inspect the inside of your home for possible moisture problems or leaks.

1. Check all exterior walls from the inside for any sign of mould or mildew. Don't forget closets where there may be poor air circulation.
2. Check plumbing fixtures, clothes washers and water heaters for evidence of leaks: swollen materials, rust, cracked or missing caulk or blistered paint.
3. Check your exhaust fans to see if they work. With your fans on, hold a light plastic bag over each one to see if it pulls the bag upwards.

### What To Do About It

1. Seal all leaks in the building envelope. Before adding wall insulation to an older home, first repair all gutter, roof, and wall flashings.
2. Bring crawl space and attic ventilation up to code. Repair broken vent screens and clear away anything blocking airflow. Never add insulation without providing adequate ventilation at the same time.
3. Where they don't already exist, install ventilation fans - vented to the exterior - at baths and ranges.
4. If existing fans are vented into the attic space, install ductwork to vent them through the roof to the outside.
5. Use your kitchen and bath exhaust fans whenever you are cooking or bathing.

# Space and Water Heating

## 1. Space Heating

### What It Is

An estimated 40 per cent of home energy use is for space heating. If your heating system is not working efficiently, as much as 30 per cent to 50 per cent of this energy is wasted. The following information will help you assess your heating system's efficiency.

### Heating System Types:

A *Central System* is one in which air or water is heated in one area and then distributed by a fan or pump to each part of the home. The temperature for the spaces served by the system is usually controlled by one thermostat centrally located. These systems include furnaces and heat pumps that push heated air through ducts (central forced air), and boilers that pump heated water through room radiators or pipes in baseboards, or within floors or ceilings. Common fuels are gas, oil or electricity.

A *Zone System* is one in which the heating units are contained in each room or space, and the temperature is controlled by its own thermostat. The most common types of zone systems are electric baseboard heaters, wall fans and radiant floor pipes (such as in a bathroom). Zone units are most commonly electric resistance, but may also use circulating water heated by gas or oil.

### Combustion Appliances

Gas and oil combustion appliances require air to burn fuel. Appliances with a sealed combustion system have a separate air intake vent (a sealed duct or pipe) which supplies air from outdoors. However, some combustion appliances use air from inside the house to support combustion. In a well air sealed house, kitchen hoods, bath exhaust fans and clothes dryers can create negative pressures within the house that can cause dangerous back drafting in which combustion gases are pulled back into the living space. Before performing any air sealing, ensure that you have either sealed combustion appliances, or that there is an alternate means (e.g. wall vents) for the appliance to draw outside air. In all cases, combustion appliances must exhaust their combustion gases to the outdoors via an exhaust vent. Call a furnace or water heater professional if you suspect that any combustion appliance is not properly exhausting to the outdoors, or if you see any damage to the vent pipes.

### How To Look For It

*Central Forced Air* (ducts in attic, basement and crawl spaces)

1. Determine when your furnace was last inspected and cleaned. Look for a record of inspections on the side of the equipment.
2. Check to see if air filters are clean.
3. If your ductwork runs through unheated spaces (such as an unheated basement or crawlspace), check for insulation and determine its depth and R-Value.

*NOTE: If you suspect that ducts or pipes are insulated with asbestos, do not touch it! Call a professional for an assessment. It must be removed by certified asbestos contractors who know how to contain it so no particles escape into your home.*



*For any type of heating system, it's a good idea to install programmable thermostats. These will allow you automatically adjust the temperature settings and schedule your heating system to provide heat when you need it, but reduce it when you are gone or at night. Programmable thermostats are now available for zone systems such as baseboard heaters and wall fans.*

4. Check the joints between each piece of ducting to ensure they are properly sealed. Joints between duct pieces should be sealed with mastic, NOT duct tape which becomes brittle with heat and age. Mastic usually looks white or grey, and is painted or spread over the seams. Note any damaged or open joints. If your ductwork is insulated, use gloves, a dust mask and goggles to protect yourself, and then pull aside any insulation to inspect all joints. Check all ductwork runs for any constriction or damage.
5. Check for air leaks around each floor vent (register). Very often the holes cut into the floor to install the heating vents are not sealed and can be a major source of air leakage.
6. Check to make sure holes no longer used by the duct system are sealed.

### Central Hot Water/Radiant Heat (in-room radiators, baseboards or pipes in-floor)

1. Check pipes for insulation.
2. If there is a radiant floor slab, check to see if it is insulated around the edges. You may be able to probe where the slab meets the foundation wall.
3. Check for the presence of an insulated or reflective panel behind radiators. These reflect heat back into the room and prevent higher heat loss at the wall.

### Zone (baseboards or wall fan units)

1. Check for dust on baseboard or wall unit heaters.
2. Check for automatic set-back thermostats for electric baseboard or wall fan heaters.
3. Check for potential air leaks at wires coming from the floor or wall.

### What To Do About It

The chart shows the differences in average efficiencies between gas and oil-fired central heating units. The numbers represent combustion efficiencies - how much useable heat is produced as opposed to what goes up the chimney - not distribution losses - heat loss from ducts or pipes. *(Note: Since electricity is not a fuel with combustible by-products, it is not included on this chart.)*

Gas-Fired		Oil-Fired	
Variable Speed Furnace	95%	Condensing Furnace/Boiler (plastic vent pipes)	90-95%
Condensing Furnace/Boiler with fame (plastic vent pipes)	90-95%	Furnace/Boiler with flame retention burner - not maintained	80%
Standard Furnace 5-10 years old	75%	Furnace/Boiler with flame retention burner	60-75%
Standard Furnace 20+ years old	68%	Standard Furnace	55%

If you are considering ways to increase the efficiency of your heating system, look first to reducing losses in your distribution system (ducts or pipes). Poorly insulated or un-sealed ducts can transfer up to half the heat produced by your heater into unheated areas of your home! To assess the cost-effectiveness of changing fuels, replacing your heating unit or tuning up your existing unit, talk to a certified heating professional. Also, the better insulated your home, the smaller the heating system needed and the less energy it will use.

### Central Forced Air

1. Oil furnaces should be replaced with high-efficiency, sealed combustion units that include a flame retention burner. Gas furnaces with over 90 per cent efficiency are a good investment and add to the resale value of a home.
2. Have your furnace inspected and cleaned regularly. Oil burning equipment should be checked yearly, gas equipment every other year.
3. Seal all joints in the ductwork with mastic. Repair any seals that have been damaged.
4. Insulate ducts to a minimum of R-8 wherever they pass through unheated areas such as garages, crawl spaces, unheated basements or attics. Insulating to R-16 or R-30 will be even more effective.

### Central Hot Water/Radiant Heat

1. Oil boilers should be replaced with high-efficiency, sealed combustion units with a minimum efficiency of 85 per cent.
2. Have your boiler inspected and cleaned regularly. Oil burning equipment should be checked yearly, gas equipment every other year.
3. Install insulation at hot water pipes. Foam pipe insulation is available for various pipe sizes. Be sure that joints and corners are thoroughly covered. Seal around any pipes that penetrate the floor.
4. If there is no insulation at the slab edge of a radiant floor, consider adding insulation to the outside of the foundation.
5. Old radiators can have new zone valves installed, improving performance.

## Zone

1. Keep furniture at least 12" away from baseboards and wall unit heaters and keep them free of dust for more effective heat flow.
2. Seal any holes or gaps around wires coming from the floor or wall.

## Space Cooling

When it's hot outside, heat will enter a home through windows, walls, the roof and air leaks. The chimney effect can reverse and pull hot air in at the top as the heavier cool air "falls out" of leaks at the lower part of a home. In Metro Vancouver, if your home is well insulated and adequately sealed, and there is good ventilation, you generally do not need air conditioning. If you do have a room that is hot, try to control the problem by reducing the heat gain rather than buying a room air conditioner. Air conditioners use a lot of power!

1. Use deciduous trees and shrubs to shade sunny walls, windows, and walkways. Vegetation not only creates shade, but its constant evaporation helps cool the surrounding air, so try to bring in ventilation air from below or near trees.
2. Add overhangs to south windows. If designed correctly, they will allow the sun's rays to enter in the winter but block them in the summer.
3. Shades can also be used on south and west windows to keep heat out, but only if installed on the exterior of the window. Mesh shade cloth can block heat, but still allow a view. Another option is roll down bamboo shades hung from the eaves.
4. If your roof is black, it will absorb the heat of the sun and re-radiate it into your home. If possible, install a radiant barrier, a shiny foil surface, to the bottom side of rafters on a south roof. There are roofing materials available that are certified by EnergyStar as high albedo, or reflective, roofs. Be sure there is good air flow through the air space in front of the foil. Proper attic ventilation, discussed in the Moisture Control section, can also greatly increase summer comfort by allowing the warm air in the attic to exhaust to the exterior before it enters the interior spaces below.

If you must use an air conditioner replace any model older than 2000 with an ENERGY STAR® unit.



## 2. Water Heating

### What It Is

Heating water for bathing and washing accounts for as much as 15 per cent to 30 per cent of your household energy use.

### How To Look For It

1. Check your water temperature. It should be around 60 degrees Celsius (140 degrees Fahrenheit) (this also prevents scalding). Water heater thermostat settings are often inaccurate. Run hot tap water over a candy or meat thermometer to verify temperature.
2. Most water heaters manufactured in the last 10 years have adequate insulation under the shell however, older units may not. Put your hand on the shell. If it feels warm, it should have an insulating blanket around it.
3. Look at the hot and cold water pipes. All exposed hot water pipes and the first five feet of the cold water pipe should be insulated. Foam pipe insulation is available for various pipe sizes.
4. Check to see if showerheads and kitchen and bath faucet aerators are low-flow models. The litre per second (gallons per minute) rating may be on the side of the aerator. Models are available that use as little as 6 litres or 1 1/2 gallons per minute.

### What To Do About It

1. Install new faucet aerators and low-flow showerheads to save on both energy and water. The following new, lower flow-rate products are readily available and deliver excellent results - most folks don't notice a difference. The City of Vancouver provides residents with Water Saver Kits that can help your bathroom use 15 to 20 per cent less water. [vancouver.ca](http://vancouver.ca)
  - Showerheads — 6 litres or 1.5 gallons per minute
  - Kitchen faucet aerators — 8.3 litres or 2.2 gallons per minute
  - Bathroom faucet aerators — 4 litres or one gallon per minute are sufficient for most lavatory tasks.
2. Install heat traps and an insulation blanket if you have an electric water heater that is more than 15 years old.
3. Replacement tanks should have an EF (Energy Factor) rating of over .62 for gas and .93 for electric. Gas-heated tankless water heaters can save about 20 per cent. Check with BC Hydro or Terasen Gas for efficiency rebates. Consider installing solar hot water - some homeowners are getting up to 60 per cent of their water heat from the sun - even in Vancouver! See [www.solarbc.ca](http://www.solarbc.ca) for more details.



## Return on Investment

*A 1925 home in Washington State had a new high efficiency boiler but needed significant air sealing in the floor, attic and on the windows to a glassed-in porch. It had no wall insulation and floor insulation was very limited. In addition, there was asbestos material in the unheated basement left when the old boiler was removed. This made air sealing the floor very important for air quality. Replacement was recommended for the front door and several of the largest old windows. Energy modeling predicted a 33 per cent savings for the investment of about \$7000 in this package - about a 13 per cent return on investment. The south exposure was excellent and hot water use fairly high, so the audit recommended adding solar hot water as well. This brought the total savings to about 40 per cent with a \$13,000 investment - a return of about 7 per cent.*

# Paybacks

Payback is an estimate of how long it will take to save enough energy to pay for the cost of a conservation measure. A payback calculation will help you decide which upgrades to prioritize. Sealing up air leaks and duct-sealing are low cost measures and usually come in first place for payback. Air infiltration can be up to a third of a home's heating load. Insulation, especially in walls or basements that have none, is an excellent investment.

When looking at how much an investment may save, consider the source of information. Someone selling a product may overestimate the savings of that product or miss lower cost measures. Information from your local utility or engaging the services of a professional can help you with unbiased information.

We recommend doing those improvements first that cost the least and save the most energy. The following list of energy conservation measures are arranged in the order of their payback.

## A. Energy Measures that Save a Lot and Have Little or No Cost

- Keep your home at or below 20 degrees Celsius (68 degrees Fahrenheit)
- Lower heating thermostat to 15 degrees Celsius (60 degrees Fahrenheit) at night and when home is unoccupied.
- Close fireplace damper when fireplace is not in use.
- Replace furnace air filters regularly.
- Lower water heater thermostats to 60 degrees Celsius (140 degrees Fahrenheit).
- Insulate electric based hot water pipes and install heat trap fittings at flex connections. Insulate the first five feet of cold line.
- Install low flow efficient showerheads and faucet aerators.
- Install gaskets behind electric outlets and switch plates on exterior walls.
- Seal air leaks to attic and crawl space with spray foam.
- Caulk and weatherstrip windows, doors, cracks and holes.
- Dust baseboard and wall heaters.

## B. Energy Measures with an Estimated One to Two-Year Payback

- Install programmable thermostats.
- Have a blower door test conducted to assist with air sealing.
- Install do-it-yourself plastic storm windows.
- Repair fireplace damper seal.
- Install compact fluorescent lights in all fixtures.
- Install dimmer switches, photocells, timers and motion detectors.
- Install do-it-yourself insulated panel or cover to seal fireplace when not in use.

- Tune up heating and cooling equipment.
- Insulate and air seal rim joist area in basement.

## C. Energy Measures with an Estimated Two to Five-Year Payback

- Insulate walls in a heated basement, and the rim joist of an unheated basement or crawl space.
- Install attic insulation to achieve a minimum R-38.
- Install underfloor insulation to achieve a minimum R-30.
- Install fireplace modifications such as glass doors, flue top damper and outside combustion air.
- Install do-it-yourself insulated window shades or shutters.
- Install wall insulation in un-insulated exterior walls.
- Install do-it-yourself solar hot water preheat.

## D. Energy Measures with an Estimated Payback of More Than Five Years

- Install commercial storm windows.
- Replace existing single-pane windows with new double, or even triple-pane, windows.
- Replace older furnace or boiler with a 90 per cent+ condensing unit.
- Install a fireplace insert into an existing fireplace.
- Install an energy efficient hot water tank or tankless hot water heater.
- Replace conventional oil furnace burner with a new flame retention burner.
- Install active solar hot water system.

# Terms to Know

**R-Value** is the resistance to heat loss. It indicates how well insulation resists heat movement. A bigger number means better insulation.

**U-Value** is how a material transmits heat - simply the inverse of R-Value ( $U = 1/R$ ). In this case, a lower number is better. U-Values are found on windows and some doors.

**AFUE (Annual Fuel Use Efficiency)** measures how much of the energy in the natural gas or oil is coming into the home as useful heat. A 94 per cent efficient furnace loses only 6 per cent of the energy in the gas or oil up the chimney vent. Old systems may run at 65 per cent AFUE with almost 35 per cent wasted heat. You will notice how much cooler the vent pipe of a modern furnace is. Boilers and some fireplaces also have AFUE ratings.

**SEER (Seasonal Energy Efficiency Ratio)** is the standard for air conditioning efficiency. It is the ratio of the cooling capacity to the power input. The higher the number the more cooling is achieved for each watt of electricity. This has improved substantially in recent years. SEER 19 or higher units are now available.

**HSPF (Heating Season Performance Factor)** is the most important measure for heat pumps. Heat pumps also have a SEER for their air conditioning function, but in Vancouver AC is often unnecessary, so the focus is on HSPF.

**EF (Energy Factor)** is the measure for the overall efficiency of water heaters. It includes the pilot light and standby loss from a tank. Standard gas hot water tanks have been about EF .58 - or about 58 per cent efficient. Tankless water heaters range from .79 - .86 EF, while some condensing boilers and water tanks reach above .90 EF.

**Litres or Gallons Per Minute** is the water flow rate for faucet aerators and showerheads.

**Heat Traps** - valves or loops of pipe - allow water to flow into the water heater tank but prevent unwanted hot-water flow out of the tank. The valves have balls inside that either float or sink into a seat, which stops convection. These specially designed valves come in pairs. The valves are designed differently for use in either the hot or cold water line.

## Case Study

*A 1956 brick-faced home in Seattle was purchased by a new buyer in 2007. It had only about 3" of attic insulation and no wall insulation. Floors over a partial crawl space were insulated with R-19, but the concrete walls of the heated basement had none nor did some short walls separating the crawl space from the heated basement. The furnace was relatively new, a standard model about 80 per cent efficient. Air sealing in the attic and floor along with sealing/insulating the air ducts in the crawlspace were judged a high priority. Analysis showed this home could see a 46 per cent savings for an investment under \$6,000--a return of nearly 20 per cent. Rising energy prices in the future would only improve these numbers.*



# Deep Green Considerations

## Drain Water Heat Recovery

If your family takes a lot of showers, these simple devices are a good investment. A simple copper tube wrapped heat exchanger fits on your vertical main drain line, where it picks up wasted heat and feeds it back to the water heater. [www.power-pipe.us](http://www.power-pipe.us)

## Heat Recovery Ventilators / Energy Recovery Ventilators

Required by Vancouver's Green Homes Program, these fan systems quietly bring in plenty of fresh air that is pre-warmed by outgoing stale air. Most units are from 60 per cent to 90 per cent efficient at recovering heat. A central ventilation system is an especially good option for a tightly sealed home and allows you to add filtration and control the sources of fresh air to improve the air quality in your home. [www.teca.ca](http://www.teca.ca).

## Laundry Spinner

A wastebasket sized gadget that can spin wet clothes at 3200 rpm, quickly taking out nearly half of the water. This reduces dryer run time up to 50 per cent and adds convenience.

## Solar Hot Water

Solar is back as a hot item again and is cost-effective in Vancouver. Some Vancouver residents are getting 50-70 per cent of their hot water needs met through solar hot water heating. Since hot water can be 15 per cent of our home energy (and greenhouse emissions), that's a big warm contribution to reducing climate change! [www.solarbc.ca](http://www.solarbc.ca)

The City of Vancouver Green Homes program requires that every new house be pre-piped with two 50 mm (2 inch) pipes to allow for the future installation of roof-mounted solar energy generating equipment without needing to tear open walls and ceilings. [www.bcsea.org](http://www.bcsea.org).

*Photo top left: Jon Alexander  
Photo top right: Grace Huang  
Photo bottom left: Power-Pipe™*

# Resources

## Energy

BC Hydro provides many incentives and grants to improve energy efficiency through their Powersmart program. The website provides useful tips for homeowners to reduce electricity cost throughout the home: [www.bchydro.com/powersmart](http://www.bchydro.com/powersmart)

Natural Resources Canada website is very comprehensive and includes all the information required for the homeowner to take advantage of the EcoEnergy Program: [oee.nrcan.gc.ca/](http://oee.nrcan.gc.ca/)

Renovating your home is an exciting process. The following site will help you make the right choices and develop a clear map to reach your renovation goals: [www.myhomereno.com/](http://www.myhomereno.com/).

CMHC has Energy Efficiency Renovation fact sheets that can help you plan your project. You can download these at [www.cmhc-schl.gc.ca/en/co/renoho/refash/](http://www.cmhc-schl.gc.ca/en/co/renoho/refash/)

For tips on harnessing the natural power of the sun for heating and cooling, see the City of Vancouver's Passive Design Toolkit for Homes downloadable at [vancouver.ca/sustainability](http://vancouver.ca/sustainability).

For assistance with selection of environmentally friendly building materials, see CMHC's 'Building Materials for the Environmentally Hypersensitive', available to purchase from [www.cmhc.ca](http://www.cmhc.ca).

For details on various green building products and for product and service provider directories, see Metro Vancouver's BuildSmart website at [www.metrovancouver.org/buildsmart](http://www.metrovancouver.org/buildsmart), as well as Light House Sustainable Building Centre at [www.sustainablebuildingcentre.com](http://www.sustainablebuildingcentre.com).

## Waste

Metro Vancouver provides a directory of recycling and salvage businesses at [www.MetroVancouverRecycles.org](http://www.MetroVancouverRecycles.org). There is also more information about recycling available from the Recycling Council of BC at [rbc.bc.ca](http://rbc.bc.ca).

## Energy: Appliances and Fixtures

For further details on the EnergyStar and EnerGuide labelling programs and energy efficiency of household appliances, visit Natural Resources Canada, [oee.nrcan.gc.ca](http://oee.nrcan.gc.ca) (click on Residential).

## Incentives & Funding

For a comprehensive list of incentives available, visit the Metro Vancouver BuildSmart website at [www.metrovancouver.org/buildsmart](http://www.metrovancouver.org/buildsmart). Incentives and funding are available from:

- BC Hydro [www.bchydro.com](http://www.bchydro.com)
- Solar BC [www.solarbc.ca](http://www.solarbc.ca)
- Terasen [www.terasen.com](http://www.terasen.com)
- CMHC [www.cmhc.ca](http://www.cmhc.ca)
- Vancity [www.vancity.com](http://www.vancity.com)
- Federal Eco Action program [oee.nrcan.gc.ca](http://oee.nrcan.gc.ca)



The Do-It-Yourself Home Energy Audit guide was originally created by the Seattle Department of Planning & Development's City Green Building Program and Seattle City Light. The Vancouver Sustainable Development Program acknowledges the City of Seattle for permission to revise these guides for use in Vancouver, B.C. The City of Seattle, and all other named contributors to the original document on which this guide is based, are not liable and the City of Vancouver takes all responsibility for any errors, omissions or other defects contained in this guide.

[vancouver.ca/sustainability](http://vancouver.ca/sustainability)



© 2010 City of Vancouver. Printed in Canada.

\* Vancouver Green Capital is a registered trademark of the City of Vancouver.

